

# Specification Sheet

## SM-15

### Specifications

<b>Size</b>	<b>5/8" x 3/4"</b>
Typical Operating Range	
100% ± 1.5%	1/4 - 25 gpm
Low Flow (Min. 95%)	1/8 gpm
Max Continuous Operating Flow	22 gpm
Max Operating Capacity	25 gpm
Max Operating Temperature	120°F
Max Operating Pressure	150 psi

Meets or exceeds AWWA C700 Accuracy Standards

### Physical Characteristics

	inches
Meter Length Screw Ends	4 1/2
Meter Casing Spuds Nominal Thread Size	1
Couplings (Tailpieces) Length	2
Nominal Thread Size	3/4
Weight	2.4 lbs

- All bronze construction
- Remote ready, 1 pulse per 5 gallons
- Polycarbonate lens resists scratching
- Large numbers for easy reading
- Great low flow
- Built-in strainer
- 5-year new meter accuracy warranty
- 25-year standard warranty for body
- Rated to 120°F



### Description

**Applications** - For use in measurement of potable cold water in residential, commercial and industrial services where flow is in one direction only.

**Main casing** - Main casings are made of a copper alloy containing not less than 85% copper such as UNS C83600 or a similar copper alloy as listed in ASTM B584 and SDWA 141.43 No Lead. The serial number is engraved on the body. The main case also shows the name of the manufacturer (IMC), and direction of flow.

**Register** - The combined gear and register unit is fully sealed, liquid filled, with a straight odometer for visual reading. For extended life the register unit is manufactured with a direct drive assembly and gears.

**Measuring chamber** - Measuring chamber is an oscillating piston type and is made of engineering plastic, such as polyethylene ether (PPE) per ASTM D4349, nylon (N) per ANSI/ASTM D4066, polyethylene per ASTM D1248, or polystyrene per ASTM D4549.

Measuring chambers have sufficient dimensional stability to retain operating clearances at working temperatures of up to 120°F (49°C) and shall not warp or deform.

***Infinity Metering Company, Inc.***



**Installation** - The meter must be installed in a clean pipeline, free from any foreign materials. The meter shall be installed with the direction of flow as indicated by the arrow cast in the meter case. The meter may be installed in horizontal to vertical lines.

**Strainers** - All meters have a strainer installed in the meter. Strainer screens are rigid, snug fitting, easy to remove, and have an effective straining area of at least double that of the main-case inlet.

**Register** - Fully sealed, straight reading direct drive.

Capacity of Register

US Gallons	10,000,000
Cubic Meters	10,000

Data Output

US Gallons	1 pulse = 5 USG
Cubic Meters	1 pulse = 5 liters

**Tamper Resistant** - The SM-15 with pulse output and in-line body design offers protection from tampering by unauthorized individuals. It cannot be disassembled while in service and the mechanically geared odometer cannot be interfered with magnetically.

**Wiring Specification**

- Black = Common
- Red = Pulse Signal
- \* Not Polarity Sensitive

**Connectors** - 3/4" x 2" meter couplings come standard with the meter. Optional couplings are available.


**Magnetic Drive** - The use of high strength magnets provides positive, reliable and dependable register coupling.

**Materials**


Main Case	Bronze
Measuring Unit	Thermoplastic
O-Ring	Nitrile Rubber
Magnet	Ceramic Ferrite
Strainer	Thermoplastic
Register Lens	Tempered Glass
Register Unit Lid	Thermoplastic
Gearing Wheels	Polycarbonate

**SM-15 Positive Displacement Meters 5/8" x 3/4"**

**Accuracy**

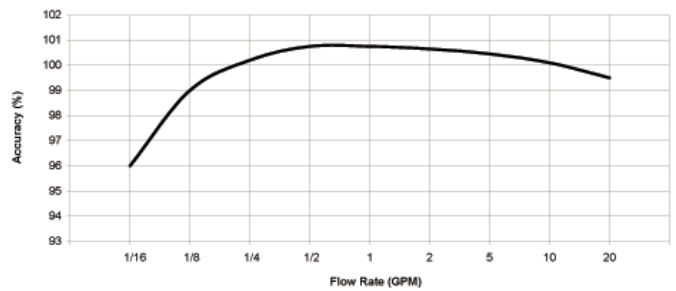

**Pressure Loss**

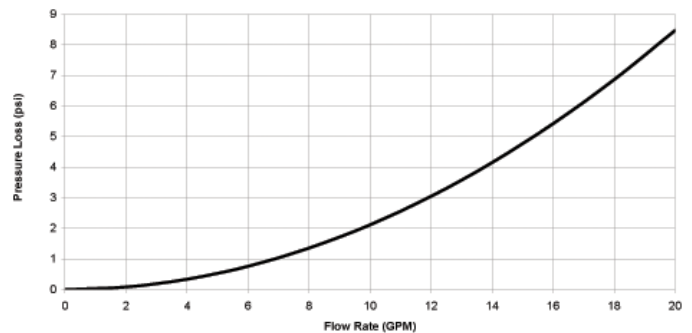

**Infinity Metering Company, Inc.**

PO Box 948  
 Claremore, OK 74018  
 918-342-2752 or 888-342-2752  
 FAX: 918-342-5949

PO Box 1088  
 Ocala, FL 34478-1088  
 352-401-0017 or 888-401-0070  
 FAX: 352-401-3464

info@imcmeter.com  
 www.imcmeter.com

Due to continuous research and product enhancements, Infinity Metering Company, Inc. reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists.

SM-15U021009